

AMX-AM Series

Compact Desktop / Wallmount Chassis for mATX Motherboard, Supporting 2 x 2.5" HDD/SSD bays









Features

- Internal 2 x 2.5" HDD/SSD bays
- Supports Flex ATX / 1U type power supply
- Desktop or Wallmount
- Supports 3COM ports


SPEC

Item		Specification		
		AMX-H110AM	AMX-H610AM	AMX-Z690AM
System	CPU	Support 6~9th Gen Intel Core i7/i5/i3 LGA1151 Processor	LGA1700 socket supports 12 th /13 th /14 th generation Alder Lake-S Intel® Core™ i9/i7/i5/i3/Pentium®/Celeron® Processor	
	Max. capacity	2 x UDIMM DDR4 , up to 32GB	2 x UDIMM DDR4 , up to 64GB	4x UDIMM DDR5, up to 128GB
Graphic	Controller	Intel® HD Graphics	Intel® HD Graphics	Intel® HD Graphics
Ethernet	Controller	1 x Intel i210	1x Intel i226	3 x Intel i210
		1 x Intel i219	1x Intel i219	1 x Intel i219
Audio	Controller	Realtek HD audio Codec	Realtek HD audio Codec	Realtek HD audio Codec
Storage	SATA	2 x SATA 3.0 Support 2.5" HDD or SSD		
	M.2	1 x mSATA for SSD	1 x M.2 for 2280 NVMe(PCIe4.0) SSD	
Expansion Slot	Pcie/PCI slot	1* PCIe x16	PCIe 4.0 : 1* PCIe x16	PCIe 4.0 : 2*PCIe X8 or 1*PCIe X16
		1* PCIe x4	PCIe 3.0 : 1* PCIe x4	PCIe 4.0 : 2*PCIe X4
		2x PCI	2x PCI	
I/O Interface	Audio	3 (Mic-in, Line-in, Line-out)		
	USB	4 x USB 3.0 / 2 x USB 2.0	2 x USB 3.2 / 2 x USB 3.0 / 4 x USB 2.0	8 x USB 3.2 / 2 x USB 2.0(Front)
	Display Interface	1 X HDMI · 1 X VGA	1 X HDMI · 1 X Display · 1 X VGA	4 x HDMI
	Serial Ports	3x RS232 (2x RS232+1x RS485 Optional)		
Power Supply	Power Type	250W~400W FLEX Power Supply		
Environmental	Operating temperature	0 ~ 45°C		
	Operating humidity	10 ~ 95% RH @ 55°C (non-condensing)		
Mechanical	Physical dimension	262 x 293 x 140 mm		
	Weight (Net)	7KG		
Certification	EMI /MEC	Compliant with CE, FCC,		
Software operating support		Windows 10 、 Windows 11 、 Linux		

AMX-H110AM

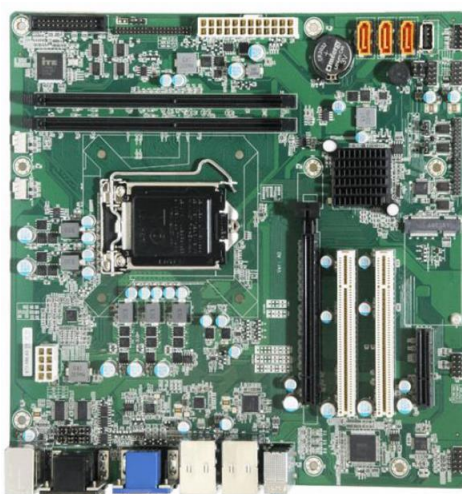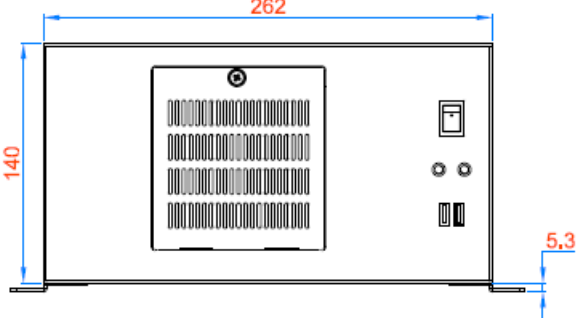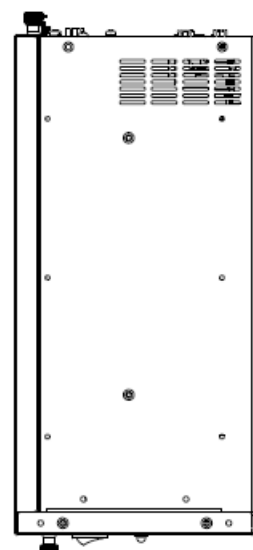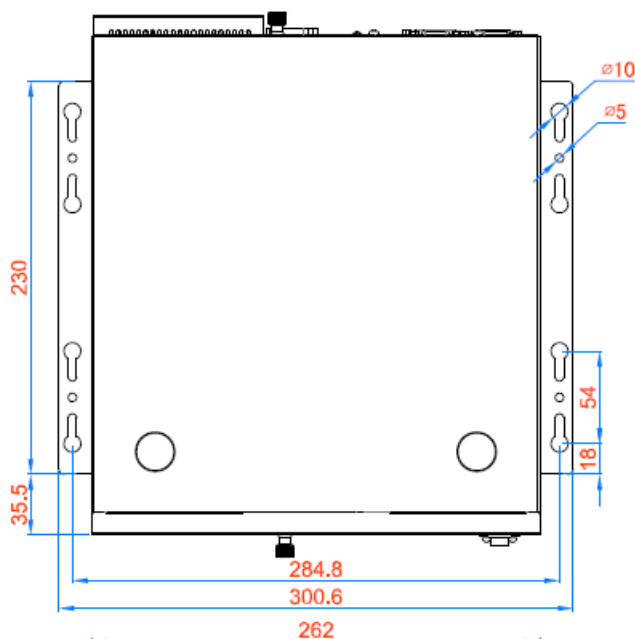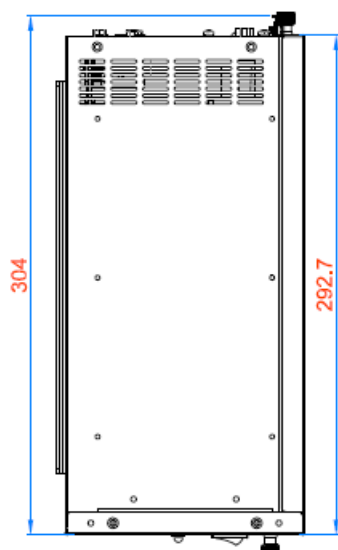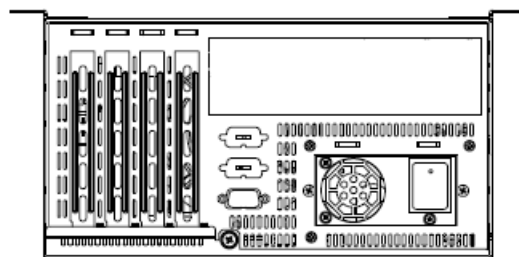

AMX-H610AM

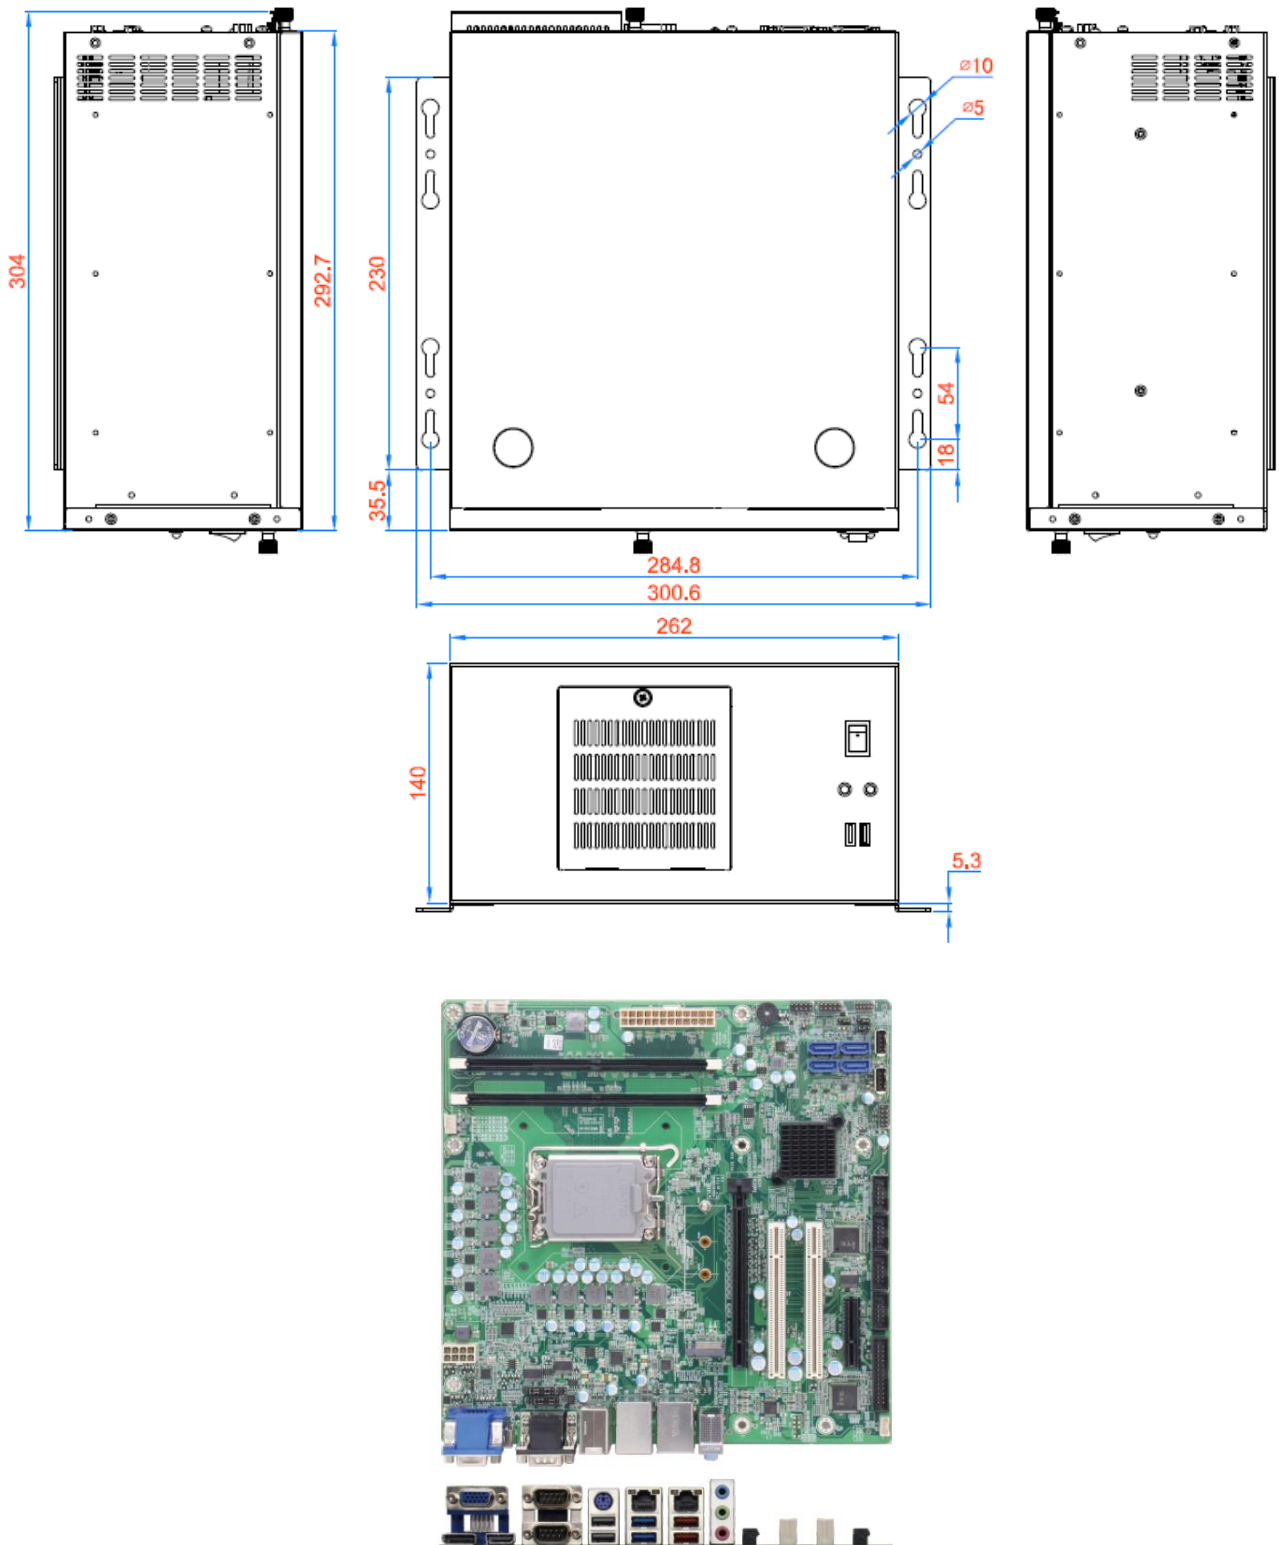

AMX-Z690AM

